



Agilent 4UHV Ion Pump Controller

For Ultra High Vacuum



The New Agilent 4UHV Ion Pump Controller

The new state-of-the-art Agilent 4UHV Ion Pump Controller operates up to four pumps simultaneously and independently. The 4UHV starts and controls ion pumps of any type (Diode, Noble Diode, StarCell) and size (from 20 to 500 l/s). A large four-line LCD display allows simultaneous reading of individual pump voltage, current and pressure. The variable voltage feature ensures optimum pumping speed and pressure reading throughout the operating pressure range. Built-in set points, remote operation and RS232/485 computer interface are standard (Profibus and Ethernet optional).



Ion Pump Evolution: since the invention of the VacIon Pump in the late 1950's, all of the major innovations have come from Varian, now Agilent Technologies.





Optimized Pumping Speed

The 4UHV will select the right operating voltage to optimize the pumping speed of your ion pumps. By applying High Voltage in accordance with operating pressure, pumping speed performance is improved.

This is because the energy with which the ion bombards the cathode is the nominal applied HV, reduced by the space charge effect due to the electron cloud present in the ion pump cell. Since the space charge effect is pressure related, a variable HV is applied to maintain optimum bombardment energy, resulting in the best possible pumping performance at any pressure.

Pumping Speed vs Pressure at Different Voltages

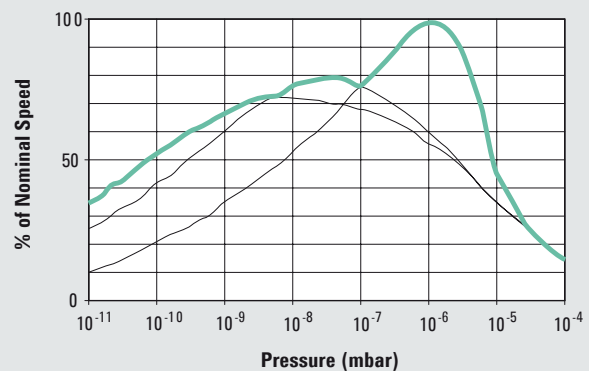



Versatility

The 4UHV is available in different configurations, in order to independently power, control and monitor any combination of multiple pumps of different sizes, from one to four pumps, from 20 to 500 l/s. For each number of pumps to be operated several options are available, 120W or 200W for a single pump, 2 x 80 W or 2 x 200 W for two pumps, 2 x 80 + 200 W for three pumps, 4 x 80 W for four pumps.





Pressure Reading

The 4UHV is preprogrammed to automatically convert current reading of any VacIon Plus pump into pressure. Thanks to its ability to detect ion current as low as 10 nA, it allows pressure measurement in the 10^{-10} mbar range.

To ensure reliable pressure reading down to the UHV region, the 4UHV optimizes the applied high voltage as a function of pressure. As a result, the leakage current of the ion pump is eliminated, thereby providing more accurate pressure readings.

Typical Current vs Pressure Curve

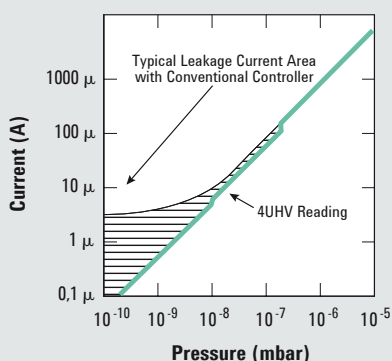


Intelligence

To access the unit you can use analog or RS232/485 ports. The controller uses the same protocol as our other intelligent vacuum devices (Navigator turbo pump Controller and Inverter scroll & rotary vane pumps), giving you fast, convenient access to all elements of the vacuum system. Profibus and Ethernet communications available on request, please call Agilent for details.



Safety

To protect you against high voltage the cable is equipped with an interlock system which immediately shuts down the high voltage when the plug is removed from the pump. The protect mode limits the current to protect the pump and the controller.



Low noise

For SEM applications especially, the remaining AC component of the HV output was reduced to a minimum. It is much lower than in any other existing unit, eliminating the need for additional filters completely in many cases.

The New Agilent 4UHV Ion Pump Controller

Technical Specifications

Input Voltage	100 - 240 Vac (+/-10%)
Input Frequency	50/60 Hz
Dimensions	400,5 x 211,4 x 177,0 (l x w x h)
Display	4 rows with 20 characters
Available configurations	1 x 120 W , 1 x 200 W , 2 x 80 W , 2 x 200 W , 4 x 80 W , 2 x 80 W +1 x 200 W
Minimum Configuration	One HV card with 120W, 200W or 2x80W
Output Voltage (Open Circuit)	3, 5 and 7 kV
Output Current (Short Circuit)	40 mA for 80 W channel, 100 mA for 200 W channel
Modes of Operation	Local / Serial / Remote
Front Panel Readings	Voltage, Pressure, Current, Status
Safety Marks	CE, C_CSA_US
Current Measurement Range	10 nA to 100 mA
Input Signals	On/off; Protect; Step Mode;
Output Signals	Analog Out; NC Set-point; NO Set-point
HV Connector	Fischer Type 105
Output Power Maximum	400 W

Ordering Information


120 W negative	929-9100
120 W positive	929-9101
200 W neg	929-9010
200 W pos	929-9011
2 x 80 W neg	929-9200
2 x 80 W pos	929-9201
2 x 200 W neg	929-9020
2 x 200 W pos	929-9021
1 x 200 W pos & 1 x 200 W neg	929-9022
4 x 80 W neg	929-9400
4 x 80 W pos	929-9401
2 x 80 W pos & 2 x 80 W neg	929-9402
2 x 80 W neg & 1 x 200 W neg	929-9210
2 x 80 W pos & 1 x 200 W pos	929-9211
2 x 80 W pos & 1 x 200 W neg	929-9212
2 x 80 W neg & 1 x 200 W pos	929-9213

Accessories and Cables *


HV bakeable cable, radiation resistant, 4 m, with Interlock	929-0705
HV bakeable cable, radiation resistant, 7 m, with Interlock	929-0707
HV bakeable cable, radiation resistant, 10 m, with Interlock	929-0708
HV bakeable cable, radiation resistant, 20 m, with Interlock	929-0709
Rack adapter 19"	929-0064
Mains cable NEMA Plug, 3 m long *	969-9958
Mains cable European Plug, 3 m long *	969-9957

(*) The unit does not include the power cable, please order the cable separately.


Outline Drawing

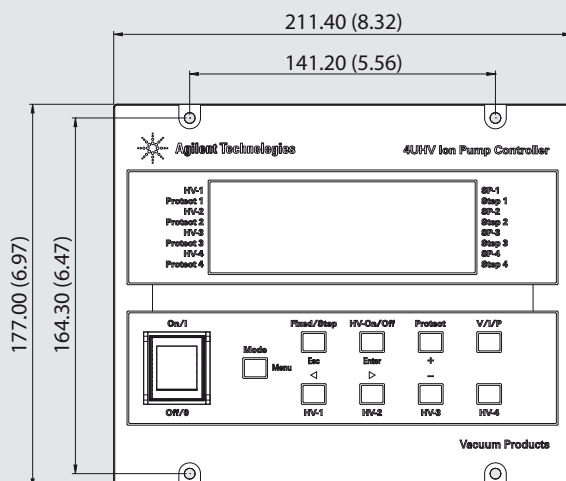

Dimensions: millimeters (inches)

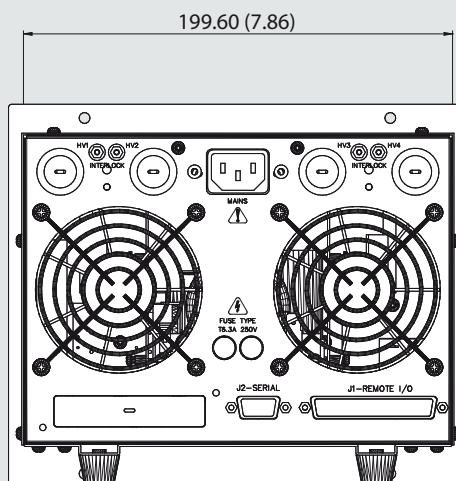

Depth: mm 400.50 (15.77)



How much power do I need for my ion pumps?

Power requirement depends on the pump size and starting pressure; the larger the pump and higher the starting pressure, the higher the power consumption. The largest standard Ion Pump configuration, 500 l/s, can be easily started with 200W up to 10^{-5} mbar, while a medium size pump (75 l/s) needs less than 80 W to be started at the same pressure, and 80 W are sufficient to operate a 500 l/s in the typical Ion Pump operating range (below 2×10^{-6} mbar)



Why was the higher power rating necessary in the past?

In the past ion pumps were started with the aid of sorption pumps, able to reach 10^{-4} mbar only. As a consequence, much larger and more powerful Ion pumps controller were needed. The resulting life of Ion Pumps started at such high pressures was much shorter (1 minute of operation at 10^{-4} mbar is equivalent to 2 months at 10^{-9} mbar). Today's oil-free turbo pumps, backed by oil-free primary pumps, achieve lower pressures, thereby reducing the starting pressure of the ion pump. This reduces the maximum power requirement of the ion pump controller and extends the lifetime of the ion pump.



Negative or positive?

The requirement of negative or positive potential depends on the pumping element installed in the ion pump. Diode style elements (Diode & Noble Diode) need positive voltages, while Triode style elements (old style Triode & StarCell) need negative voltages for operation.



The New Agilent 4UHV Ion Pump Controller

Agilent Technologies

United States and Canada

Agilent Technologies
121 Hartwell Avenue
Lexington, MA 02421
USA
Tel.: +1 781 861 7200
Toll-Free: +1 800 882 7426
Fax: +1 781 860 5437
vpl-customerservice@agilent.com

Benelux

Agilent Technologies Netherlands B.V.
Herculesweg 8
4338 PL Middelburg
The Netherlands
Tel: +31 118 671570
Fax: +31 118 671569
Toll free: 00 800 234 234 00

China

Agilent Technologies (China) Co. Ltd
No.3, Wang Jing Bei Lu,
Chao Yang District,
Beijing, 100102
China
Tel.: +86 (10) 6439 7888
Fax: +86 (10) 6439 1318
Toll-Free: 800 820 8266
vpc-customerservice@agilent.com

France

Agilent Technologies France
7 avenue des Tropiques
Z.A. de Courtaboeuf - B.P. 12
91941 Les Ulis cedex
France
Tel.: +33 (0) 1 69 86 38 84

Fax: +33 (0) 1 69 86 29 88
Toll free: 00 800 234 234 00
vpf.sales@agilent.com

Germany & Austria

Agilent Technologies
Alsfelder Strasse 6
Postfach 11 14 35
64289 Darmstadt
Germany
Tel.: +49 (0) 6151 703 353
Fax: +49 (0) 6151 703 302
Toll free: 00 800 234 234 00

India

Agilent Technologies India Pvt. Ltd.
G01. Prime corporate Park,
230/231, Sahar Road,
Opp. Blue Dart Centre,
Andheri (East), Mumbai – 400 099.
India
Tel: +91 22 30648287/8200
Fax: +91 22 30648250
Toll Free: 1800 113037
cag_india@agilent.com

Italy

Agilent Technologies Italia S.p.A.
via F.lli Varian 54
10040 Leini, (Torino)
Italy
Tel.: +39 011 997 9111
Fax: +39 011 997 9350
Toll-Free: 00 800 234 234 00
vpt.sales@agilent.com
vpt-customerservice@agilent.com

Japan

Agilent Technologies Japan, Ltd.
8th Floor
Sumitomo Shibaura Building
4-16-36 Shibaura Minato-ku
Tokyo 108-0023
Japan
Tel.: +81 3 5232 1253
Toll-Free: 0120 655 040
Fax: +81 3 5232 1710
vpj-customerservice@agilent.com

Korea

Agilent Technologies Korea Ltd.
Shinsa 2nd Bldg. 2F
966-5 Daechi-dong
Kangnam-gu, Seoul
Korea 135-280
Tel.: +82 2 3452 2455
Toll-Free: 080 222 2452
Fax: +82 2 3452 2451
vpk-customerservice@agilent.com

Mexico

Agilent Technologies
Concepcion Beistegui No 109
Col Del Valle
C.P. 03100
Mexico, D.F.
Tel.: +52 5 523 9465
Fax: +52 5 523 9472

Singapore

Agilent Technologies Singapore Pte Ltd
No.1 Yishun Avenue 7
Singapore 768923

Tel: +65 6215 8045
Fax : +65 6754 0574
Toll-Free: 1 800 2762622
vps-customerservice@agilent.com

South East Asia

Agilent Technologies Sales Sdn Bhd
Unit 201, Level 2 uptown 2,
2 Jalan SS21/37, Damansara Uptown
47400 Petaling Jaya ,
Selangor , Malaysia
Tel : +603 7712 6106
Fax: +603 6733 8121
Toll-Free: 1 800 880 805
vps-customerservice@agilent.com

Taiwan

Agilent Technologies Taiwan Limited
20 Kao-Shuang Rd.,
Pin-Chen City, 324
Taoyuan Hsien , Taiwan, R.O.C.
Tel. +886 34959281
Toll Free: 0800 051 342
vpw-customerservice@agilent.com

UK & Ireland

Agilent Technologies UK Ltd
6 Mead Road
Oxford Industrial Park
Yarnton, Oxford OX5 1QU
UK
Tel.: +44 (0) 1865 291570
Fax: +44 (0) 1865 291571
Toll free: 00 800 234 234 00
vpt-customerservice@agilent.com



This information is subject to change without notice

© Agilent Technologies, Inc. 2011
Published May 27, 2011
VPD-0411EN



Agilent Technologies